




STOREFRONT




METAL SIDING

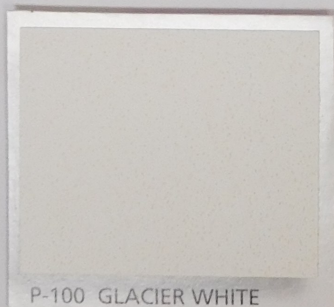

P-100 GLACIER WHITE

STUCCO

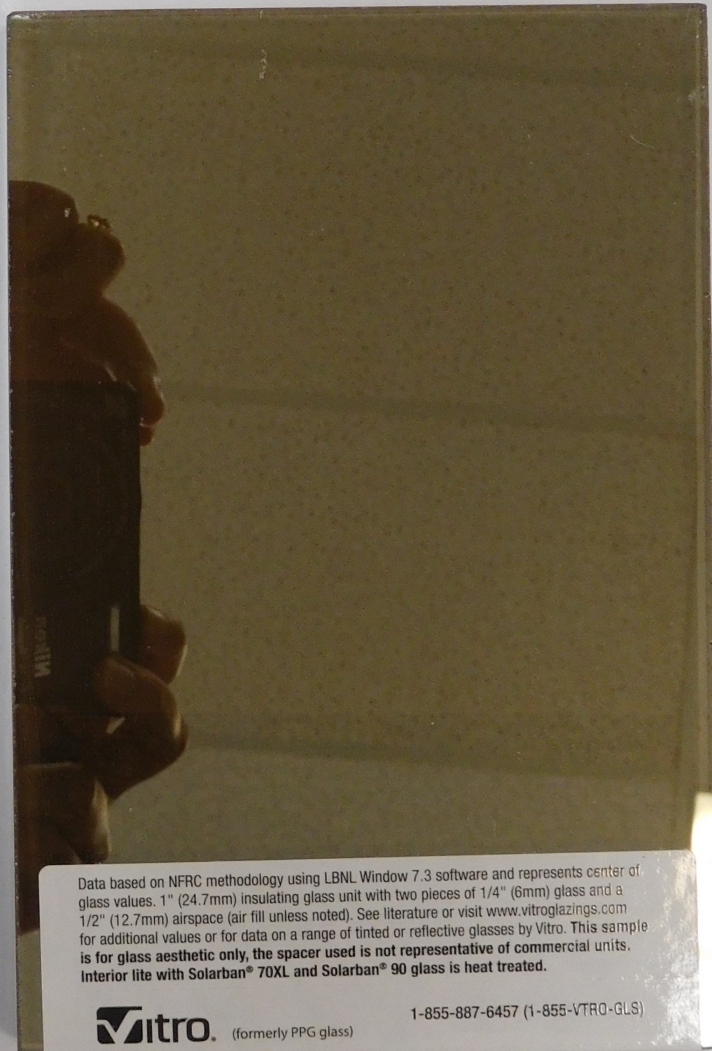

Data based on NFRC methodology using LBNL Window 7.3 software and represents center of glass values. 1" (24.7mm) insulating glass unit with two pieces of 1/4" (6mm) glass and a 1/2" (12.7mm) airspace (air fill unless noted). See literature or visit www.vitroglazings.com for additional values or for data on a range of tinted or reflective glasses by Vitro. This sample is for glass aesthetic only, the spacer used is not representative of commercial units. Interior lite with Solarban® 70XL and Solarban® 90 glass is heat treated.

Vitro (formerly PPG glass)

1-855-887-6457 (1-855-VTRO-GLS)

GLASS

MATERIALS BOARD
SUBSTANTIAL CONFORMANCE
8923 LA MESA BLVD